

3x3 Fused PM Fiber Standard Splitter (Mixer)

Features

- Low Excess Loss
- Polarization Insensitive
- High Power Handling
- Available for Slow or Fast Axis Operation
- Telcordia GR-1221 Compliant Test



Application

- Optical Amplifier
- Optical Sensor
- Coherent Communication
- Optical Testing Equipment

Specifications

Parameter	Unit		Premium	A grade
Port Configuration			3x3 (Splitting Ratio: 33:33:33)	
Central Wavelength ¹	nm	-	1310, 1480, 1550	
Bandwidth	nm	-	± 20	
Excess Loss	dB	Typ.	0.6	0.8
Excess Loss	dB	Max.	0.8	1.0
Polarization Extinction Ratio	dB	Min.	17	15
Splitting Ratio Tolerance	%	Max.	± 10	± 13
Return Loss ²	dB	Min.	50	45
Directivity	dB	Min.	55	
Power Handling	W	Max.	2	
Operating Temperature	°C	-	-40 to +85	
Storage Temperature	°C	-	-50 to +85	
Package Type	mm	-	S6/S12/M2	



* All specifications are before connectors. PER is 2dB lower and EL is 0.2dB higher after connectors

¹ Central wavelength can be customized for different applications



² Test at central wavelength only.

Package dimension


S6




S12



M2
Alloy Aluminum

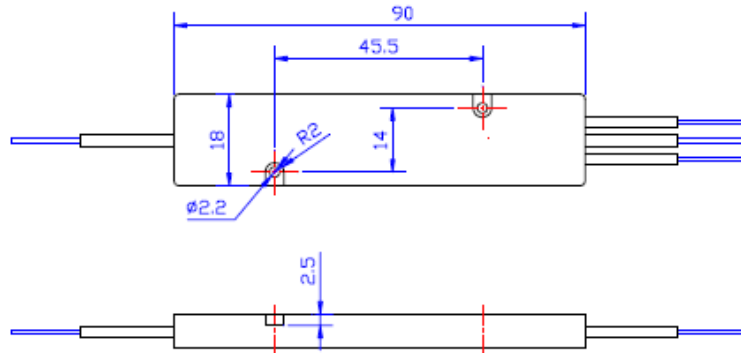

Ordering Information

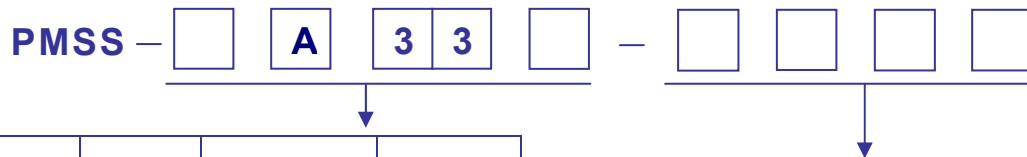

Wavelength	Structure	Splitting Ratio	Grade
4 - 1550 nm 5 - 1480 nm 7 - 1310 nm	A - 3x3	33 - 33:33:33	P - Premium A - A grade

Package	Fiber Type	Fiber Length	Connector
5 - S6 with 250µm bare fiber B - S12 with 0.9mm loose tube E - M2 with 3mm cable	E - Panda fiber	0 - 0.5m 1 - 0.75m 2 - 1.0m	0 - None 1 - FC/PC 2 - FC/SPC 3 - FC/APC 7 - FC/UPC

Contact Information

For more information about BATi's' leadership in photonics devices, visit our website at www.bostonati.com.

To obtain additional technical information or to place an order for this product, please contact us at:

Phone: 1-781-935-2800
Fax: 1-781-935-2860
E-mail: sales@bostonati.com