

500mW Polarization Maintaining Isolator for Pulse Application


(HPMI Series)

The High Power Polarization Maintaining Isolator is characterized with low insertion loss, high isolation, high power handling, high return loss, excellent environmental stability and reliability. It is ideal for fiber laser and instrumentation applications.

Specifications

Parameters	Unit	Grade P	Grade A
Center Wavelength	nm	1064 or specify	
Min. Extinction Ratio	dB	20	18
Typ. Peak Isolation	dB	40	38
Min. Isolation at 23°C, all polarization states	dB	35	32
Typ. Insertion Loss at 23°C	dB	1.3	1.6
Max. Insertion Loss at 23°C	dB	1.6	1.9
Min. Return Loss (Input/Output)	dB	50/50	45/45
Max. Optical Power (Continuous Wave)	mW	500	
Max. Peak Power for ns pulse	kW	5	
Max. Tensile Load	N	5	
Fiber Type		PM 980 Panda fiber	
Operating Temperature	°C	0 to +50	
Storage Temperature	°C	-20 to +75	

Dimension

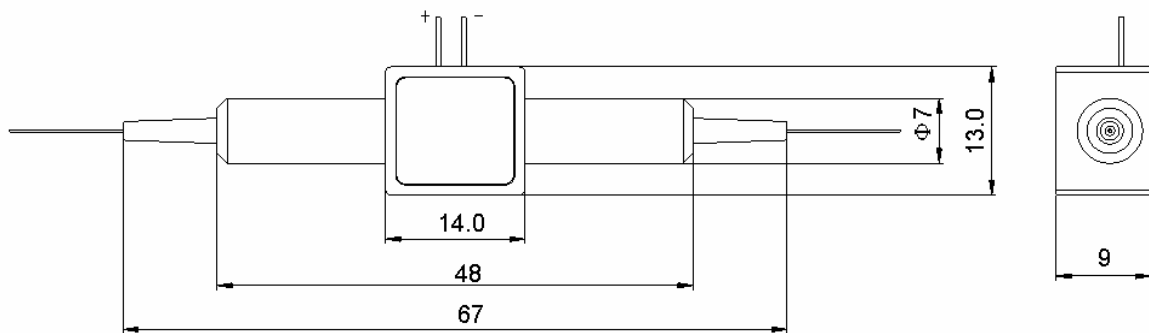

Tolerance: $x \pm 1 \text{ mm}$; $x.x \pm 0.2 \text{ mm}$
Apply max. 2V DC to the two pins with indicated polarities

Ordering Information

HPMI500-①①-②-③-④-⑤-⑥-P	
①①: Wavelength	④: Fiber Type
06 - 1064nm	B - 250um bare fiber
SS - Specify	L - 900um loose tube
	S - Specify
②: Grade	
P - Premium	⑤: Fiber Length
A - A grade	Q - 0.75 m
	S - Specify
③: Connector Type	
N - None	⑥: Working Axis
	F - Fast Axis Blocked
	B - Both Axes working

Contact Information

For more information about BATi's leadership in photonics devices and other optical networking modules and components, visit our website at www.bostonati.com.

To obtain additional technical information or to place an order for this product, please contact us at:

Phone: 1-781-935-2800

Fax: 1-781-935-2860

E-mail: sales@bostonati.com

Boston Applied Technologies, Incorporated, 6F Gill Street, Woburn, MA 01801 USA. Any information contained herein shall legally bind BATi only if it is specifically incorporated into the terms and conditions of a sales agreement. This product information is subject to change without notice. OptoCeramic is a registered trademark of Corning Incorporated

