

Polarization Maintaining Fiber Collimator

(PMC Series)


The PM Fiber Collimator is the basic element for in-line PM fiber optics components, such as PM isolator and PM DWDM. It has high extinction ratio, low insertion and high return loss. The unique processing and high quality AR coating also enable this collimator to handle high power.

Specifications

Parameters	Unit	Values
Center Wavelength	nm	1310,1550 or Specify
Operating Wavelength Range	nm	± 30
Working Distance	mm	5 or Specify
Typ. Insertion Loss @ 5mm	dB	0.20
Max. Insertion Loss @ 5mm	dB	0.25
Typ. Extinction Ratio	dB	25
Min. Extinction Ratio	dB	22
Min. Return Loss	dB	60
Tensile Load	N	5
Fiber Type		PM Panda fiber or Specify
Operating Temperature	°C	-5 to +70
Storage Temperature	°C	-40 to +85

1. Above specifications are for device without connector. PM fiber & connector key are aligned to the slow axis.
2. For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, and ER will be 2dB lower.

Dimension

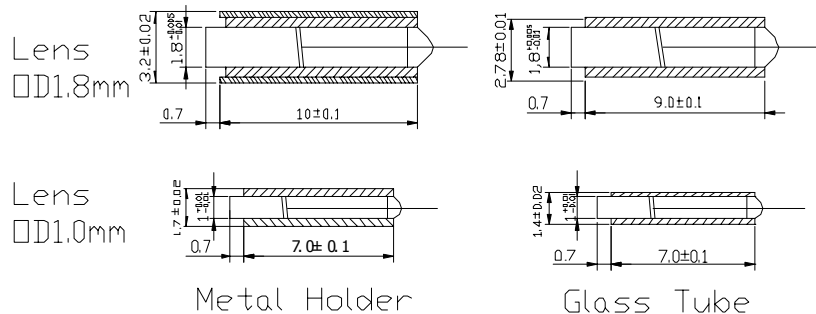

Ordering Information

PMC-①-②-③-④-⑤-⑥-⑦-⑧-⑨-⑩

①: Lens Diameter

1 - 1.8mm
2 - 1.0mm (for single fiber only)
S - Specify

②: Pigtail Type

1 - Single fiber pigtail
2 - Dual fiber pigtail (for 1.8mm only)
S - Specify

③: Wavelength

1 - 1310nm
2 - 1550nm
S - Specify

④: Package Type

1 - Metal Holder
2 - Glass Tube

⑤: Working Distance

1 - 5mm
S - Specify

⑥: Connector Type

1 - FC/UPC
2 - FC/APC
3 - SC/UPC
4 - SC/APC
N - None
S - Specify

⑦: Fiber Type

B - 250um Panda fiber
D - 400um Panda fiber
L - 900um loose tube
S - Specify

⑧: Slow Axis Orientation

O - For single fiber collimator
E, F, T - For Dual fiber collimator(refer to figure)
S - Specify


⑨: Fiber Length

C - 1.5m
S - Specify

⑩: Lens Type

G - Grin lens
C - C lens

Figure for Slow axis orientation

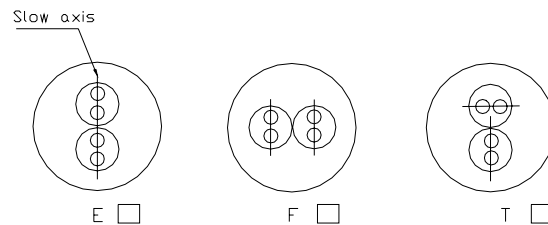

Contact Information

For more information about BATi's leadership in variable optical attenuation technology and other optical networking modules and components, visit our website at www.bostonati.com.

To obtain additional technical information or to place an order for this product, please contact us at:

Phone: 1-781-935-2800
Fax: 1-781-935-2860
E-mail: sales@bostonati.com