

In-line Faraday Rotator

(ILF Series)




The In-line Faraday Rotator is designed to rotate the polarization of the input light by 45 degrees. It performs low insertion loss, high extinction ratio, high return loss and excellent environmental stability. It is used in sensors, circulators, amplifiers, lasers, etc.

Specifications

Parameters	Unit	Values
Center Wavelength	nm	1310, 1480 or 1550
Operating Wavelength Range	nm	± 15
Typ. Insertion Loss	dB	0.3
Max. Insertion Loss	dB	0.5
Rotation Angle, CWL, at 23°C	deg	45 ± 1
Min. Extinction Ratio (Slow axis of port 1 is aligned to slow axis of port 2, for PM-PM type, at 23°C)	dB	20
Min. Extinction Ratio (Slow axis of port 2 is aligned to fast axis of port 1, for PM-PM type, at 23°C)	dB	20
Min. Return Loss	dB	50
Max. Optical Power (Continuous Wave)	mW	300
Operating Temperature	°C	-5 to +70
Storage Temperature	°C	-40 to +85

1. Above specifications are for device without connector.
2. For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, and ER will be 2dB lower.

Dimension

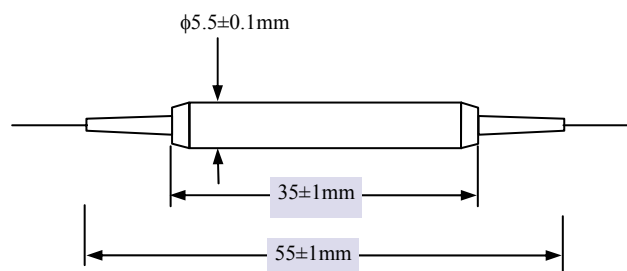

Ordering Information

ILF-①①-②-③-④-⑤

①①: Wavelength

31 - 1310nm

48 - 1480nm

55 - 1550nm

SS - Specify

②: Connector Type

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

S - Specify

③: Fiber Type

B - 250um Panda fiber

D - 400um Panda fiber

L - 900um loose tube

C - 3mm cable

S - Specify

⑤: Fiber Length

Q - 0.75 m

S - Specify

④: Fiber Type (Port1-Port2)

1 - PM-PM

2 - SMF-PM

3 - SMF-SMF

Remark: The PM fiber and the connector key are aligned to the slow axis.

Contact Information

For more information about BATi's leadership in variable optical attenuation technology and other optical networking modules and components, visit our website at www.bostonati.com.

To obtain additional technical information or to place an order for this product, please contact us at:

Phone: 1-781-935-2800

Fax: 1-781-935-2860

E-mail: sales@bostonati.com